



Terracom - TERRA-EX

IP AUDIO DECODER

TERRA-EX CHARACTERISTICS

- 2 balanced independent line outputs
- 1 headphone output on mini-jack.
- Audio outputs: maximum level + 5 dB, bandwidth 20 Hz - 20 kHz
- Ethernet interface including POE (Power over Ethernet).
- 24 VDC power supply (if no POE available).
- G.711, G.722, MP3 audio decoding.
- 1 optional USB port for USB memory stick
- Power & Status LED.
- 1 optional IR receiver - optional
- 3 contact inputs
- 1 relay output
- 1 RS 232 on Euro Block
- Shoutcast/Icecast decoding
- AAC decoding on Shoutcast/Icecast
- Power consumption: 2 W
- Weight: 433 g
- Dimensions (mm): Depth 104, Height 32, and Width 109.



TERRA-EX is an IP audio decoder with an optional USB flash memory interface for playlist backup or prerecorded announcement. Since the output device is the most price sensitive part of an IP audio system, ATEIS has proposed the best cost effective output device with 2 independent balanced line outputs, a scheduler and POE.


The TERRA-EX will be your ideal IP solution for any applications where you need a simple balanced audio output with some I/O contacts & relays.

Thanks to its price, the shoutcast/icecast decoding, the USB backup, the scheduler and the advertising management, the TERRA-EX is also the perfect product for retail shops. The volume and the channel can be modified locally with an IR remote control or a RAC remote controller.

The TERRA-EX uses G.711 / G.722 / PCM / MP3 decoding. Network sources and volume controls can be implemented thanks to the analog inputs. Priority management, volume management, event management & scheduler are set up thanks to embedded web pages.

TERRA-EX belongs to the TERRACOM range, the new ATEIS Audio over IP solution.

INSTORE APPLICATION

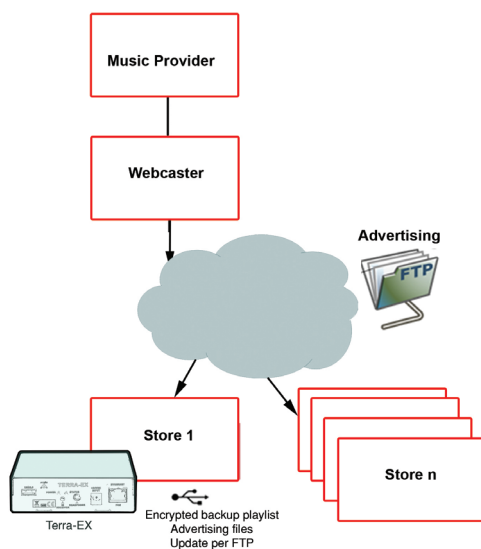

TERRA-AMP synoptic

