



DELIVERING YOUR MESSAGE

SENTRY6/RTC

Vandal Proof Metal Cabinet

MAIN PROPERTIES

Rated power, Watts: 6

Tappings 100 volt line, Watts: 6/3/1.5/0.75/0.25

Transformer Impedance, Ohms, 100V:
1.67k/3.33k/6.66k/13.3k/40k

Tappings 70.7 volt line, Watts: 3/1.5/0.75/0.375/0.125

Driver impedance, Ohms: 8

Effective frequency range, Hz (BSEN60268-5): 250 – 18,000

S.P.L. @ 1m, 1 watt, dB, Test Signal Bandwidth 100Hz-10 kHz: 90

S.P.L. @ Full power Octave Bandwidth, dB: 97

Acoustic Power (dB-PWL@1 watt) 1 k/2kHz, dB: 87 / 87

Dispersion at 1k/2k Hz, Degrees: 140/110

Directivity Axial Q factor, 1 k/2kHz: 4.6/6.7

Dimensions, front & depth, mm: 194 x 75

Net weight, Kgs: 1.5

Colour/Finish White: RAL9016

Material Steel Front, Die cast back box

Mounting Screw

Mounting: Stainless Steel U Bracket.






DELIVERING YOUR MESSAGE


SENTRY6/RTC

Vandal Proof Metal Cabinet



front view
unit: mm

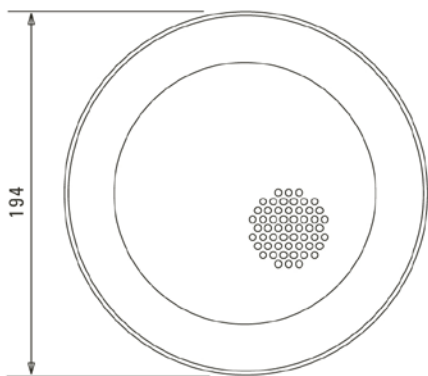

top view
unit: mm

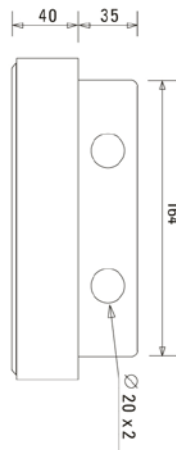


circuit diagram

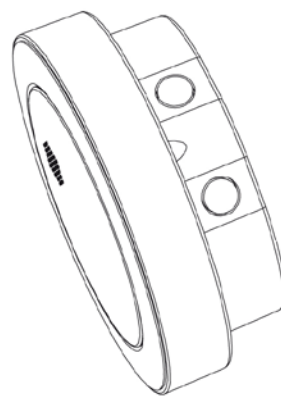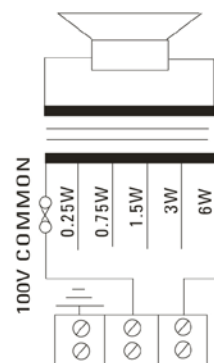

isogonal view



speech octave band sensitivity

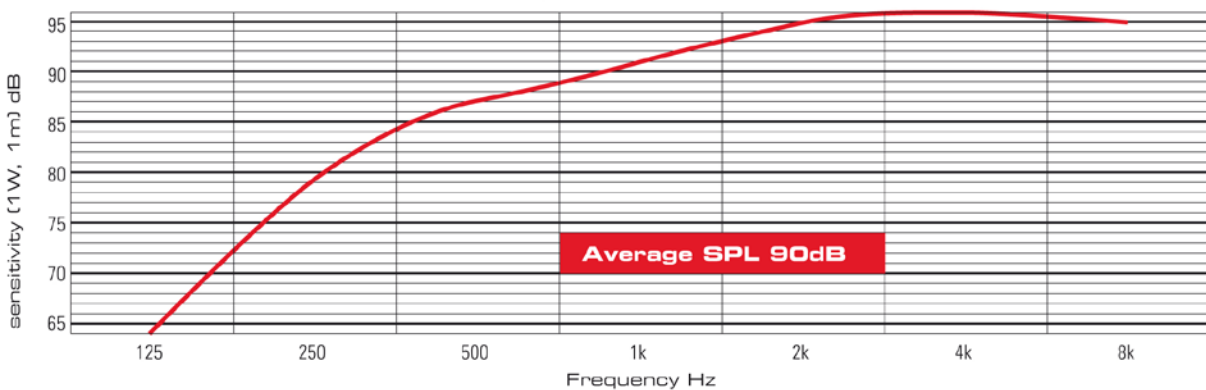

Effective Frequency Range **SENTRY6/RTC** 250Hz - 18,000Hz